


Memory Management

For most programming languages memory management has two parts:

- (1) Static - global data, compiled code, runtime system
- (2) Dynamic - runtime stack (activation record stack), heap (!)

Chap. 14

Typical Memory Layout

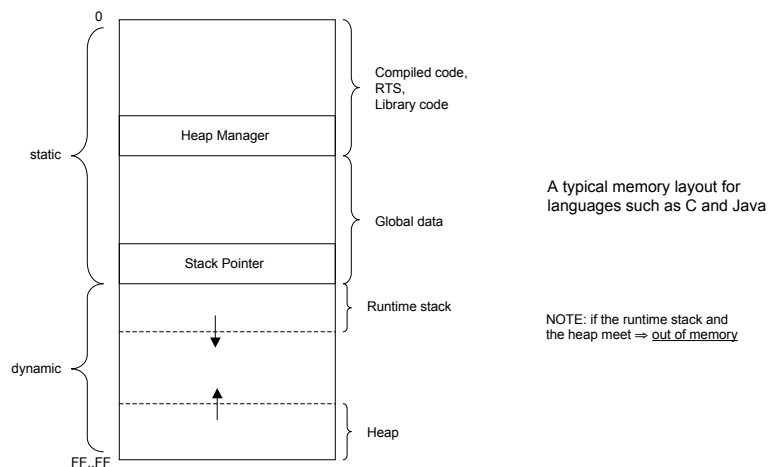

The Heap

Runtime systems allocate dynamically created objects on the heap by a call to the heap manager.

In Java the heap manager is called with the new keyword.

In C the heap manager is called using the malloc function.

Observation:

In languages like Java and ML heap memory is reclaimed by the heap manager automatically via garbage collection when it is no longer used.

In C the programmer has to explicitly manager heap memory with malloc/free function calls. This is error prone and leads to the (in)famous dangling pointer reference (free called too early) and the memory leak (free never called) problems.

Example C (Memory Leak)

Program


```
void f()
{
    struct Object * o = malloc(sizeof(struct Object));

    struct Object * p = o;

    o = NULL;

}
(pop activation record off the runtime stack)
```

Heap Manager



Example C (Dangling Pointer)

Program


```
void f()
{
    struct Object * o = malloc(sizeof(struct Object));

    free(o);

    struct Foo * p = malloc(sizeof(struct Foo));

    o->ObjectAttribute = value;
    p->Print();
    free(p);
}
```

Heap Manager



Example Java (Garbage Collection)

Program

```
void f()
{
    Object o = new Object();

    Object p = o;

    p = null;
}
(pop activation record off the runtime stack)
```

Heap Manager

